# KDS720

## ø184 (7.25") Race Driven Plates

CIRCUIT RACING

## Specification

| Nominal | Ø | No. of Teeth | New Thickness | Part Number: A -Type - 11.7 hub length | Part Number: B -Type - 9.6 hub length | Part Number: C -Type - 5.6 hub length |
|---|---|---|---|---|---|---|
| 1 1/8" x 10T | 28.58 | 10 | 2.63mm | KDS720FA06X001 | KDS720FB06X001 | KDS720FC06X001 |
| 29 x 10T | 29.00 | 10 | 2.63mm | KDS720FA10X001 | KDS720FB10X001 | KDS720FC10X001 |
| 25 x 14T | 25.00 | 14 | 2.63mm | KDS720FA12X001 | KDS720FB12X001 | - |
| 21 x 18T | 21.00 | 18 | 2.63mm | KDS720FA17X001 | KDS720FB17X001 | - |
| 7/8" x 20T | 22.20 | 20 | 2.63mm | KDS720FA25X001 | KDS720FB25X001 | KDS720FC25X001 |
| 24.25 x 21T | 24.25 | 21 | 2.63mm | KDS720FA27X001 | KDS720FB27X001 | - |
| 29 x 21T | 29.00 | 21 | 2.63mm | KDS720FA28X001 | KDS720FB28X001 | KDS720FC28X001 |
| 1.0" x 22T | 25.40 | 22 | 2.63mm | KDS720FA29X001 | KDS720FB29X001 | - |
| 1.0" x 23T | 25.40 | 23 | 2.63mm | KDS720FA30X001 | KDS720FB30X001 | KDS720FC30X001 |
| 20.5 x 24T | 20.50 | 24 | 2.63mm | KDS720FA32X001 | - | - |
| 1.0" x 24T | 25.40 | 24 | 2.63mm | KDS720FA33X001 | KDS720FB33X001 | - |
| 22 x 26T | 22.00 | 26 | 2.63mm | KDS720FA35X001 | KDS720FB35X001 | - |
| 1 5/32" x 26T | 29.36 | 26 | 2.63mm | KDS720FA36X001 | KDS720FB36X001 | - |
| 1 1/4" x 29T | 31.75 | 29 | 2.63mm | KDS720FA38X001 | KDS720FB38X001 | - |
| 1 1/8" x 26T | 28.58 | 26 | 2.63mm | KDS720FA72X001 | KDS720FB72X001 | - |
| 25.8 x 24T | 25.80 | 24 | 2.63mm | KDS720FA86X001 | - | - |
| 22 x 28T | 22.00 | 28 | 2.63mm | KDS720FA95X001 | - | - |

Driven plates with B-type and C-type hubs can be used on the flywheel side of the clutch to provide increased clearance. If the configuration you require is not listed contact Alcon Sales for assistance.

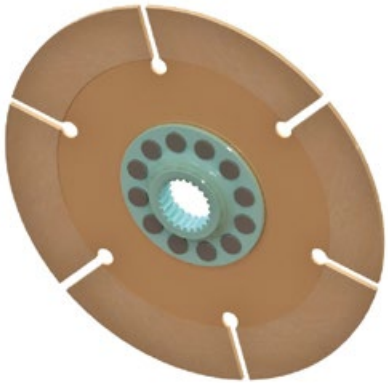

## Key Features & Benefits

- Optimised hub length for low inertia with minimum hub wear.
- Sintered friction material for reduced inertia and lower cover height
- Interchangeable with other manufactures products.
- Various hub configurations available to provide increased hub to crank bolt clearance.
- 2.63mm plate thickness.

## Installation Dimensions

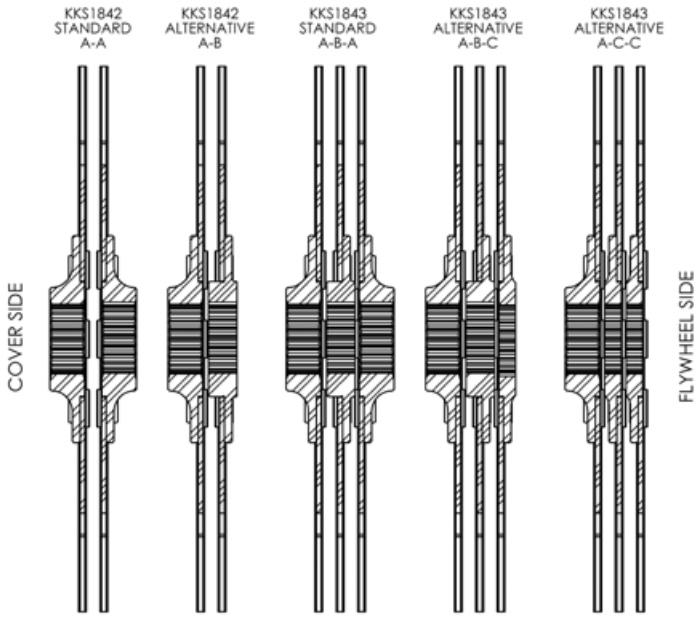




alcon specialist brakes & clutches